

A240T/A480T/A500T/A720T POTENTIAL TRANSFORMER FUSES



POTENTIAL TRANSFORMER FUSES

Ferraz Shawmut E-rated PT fuses are current limiting fuses with high interrupting rating, used for primary winding protection of potential transformers. They are small dimension, ferrule-type fuses and mounted in standard clips. Ratings are 1/2E to 5E at 2.4, 4.8, 5.0 and 7.2kV.

Features/Benefits

- **Current limiting** protection for transformers
- **Ferrule mounting** for ease of installation in standard clips
- **Compact size** saves valuable mounting space
- **Fiberglass melamine body** provides dimensional stability in harsh industrial environments
- **Metal embossed catalog number** for lasting identification

Ratings


- **A240T**
AC: 1/2E to 5E
2400VAC, 50kA I.R. Sym.
- **A500T**
AC: 1/2E to 5E
5000VAC, 50kA I.R. Sym.
- **A480T**
AC: 1/2E to 5E
4800VAC, 50kA I.R. Sym.
- **A720T**
AC: 1E to 2E
7200VAC, 50kA I.R. Sym.

HIGHLIGHTS:

- E-Rated
- Current-Limiting

APPLICATIONS:

- Primary protection for 2.4, 4.8, 5.0 or 7.2kV potential transformers

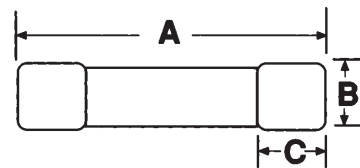

Standard Fuse Ampere Ratings, Catalog Numbers

E RATING	CATALOG NUMBER			
	2400V	4800V	5000V	7200V
1/2E	A240T1/2E	A480T1/2E	A500T1/2E-1	A720T1/2E-1
1E	A240T1E	A480T1E	A500T1E-1	A720T1E-1
2E	A240T2E	A480T2E	A500T 2E-1	A720T2E-1
3E	-	A480T3E	A500T3E-1	A720T3E-1
4E	-	A480T4E	A500T 4E-1	-
5E	A240T5E	A480T5E	A500T5E-1	-

Dimensions

CATALOG NO. PREFIX	DIMENSIONS - inches			FUSE CLIPS*	
	A	B	C	CENTERS	CAT. NO.
A240T	4-5/8	13/16	5/8	4.0"	C08917P
A480T	5-5/8	13/16	5/8	5.0"	C08917P
A500T	5-5/8	1	9/16	5.0"	-
A720T	9-1/2	13/16	5/8	8.88"	C08917P


*Use 2 clips per fuse.

A240T/A480T

POTENTIAL TRANSFORMER FUSES


A240T1/2E to 5E

Melting Time – Current Data - PT Fuses - 2400V

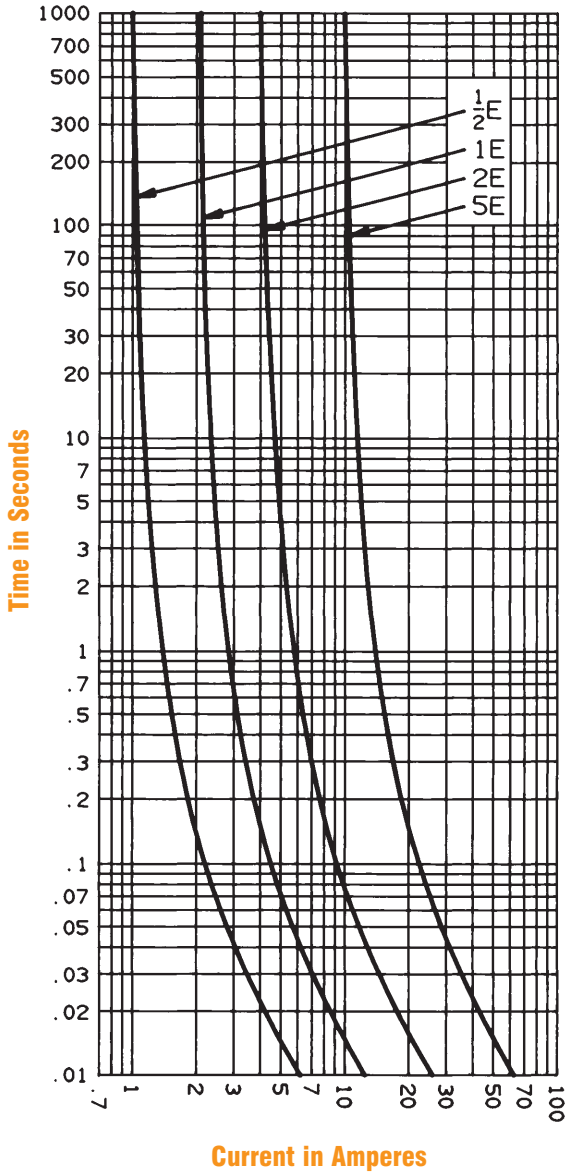

A480T1/2E to 5E

Melting Time – Current Data - PT Fuses - 4800V

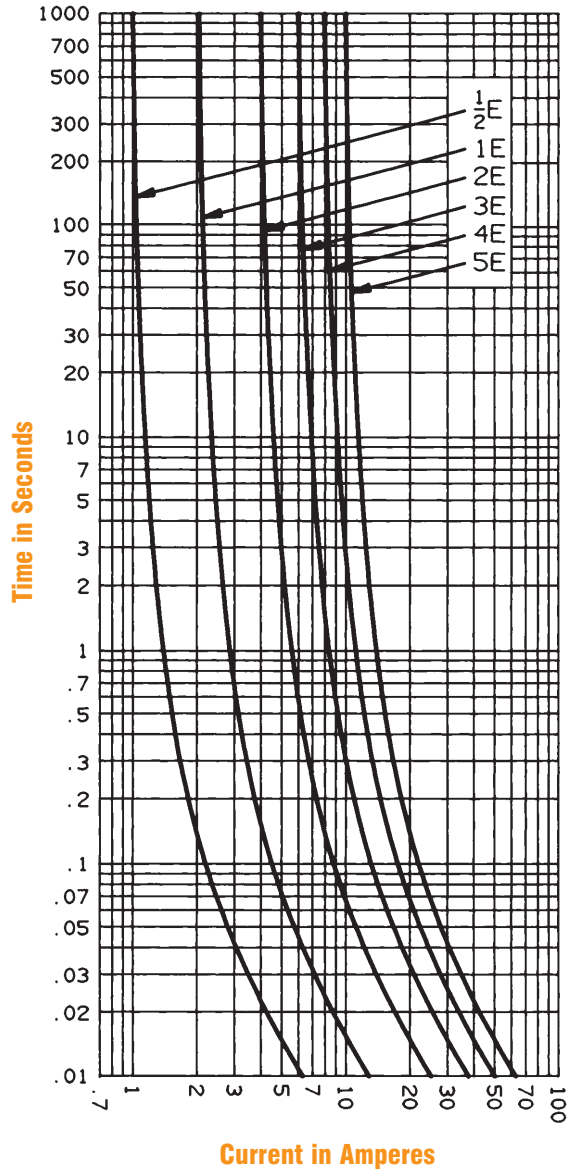


A500T/A720T

POTENTIAL TRANSFORMER FUSES

A500T1/2E-1 to 5E-1

Melting Time – Current Data - PT Fuses - 5000V

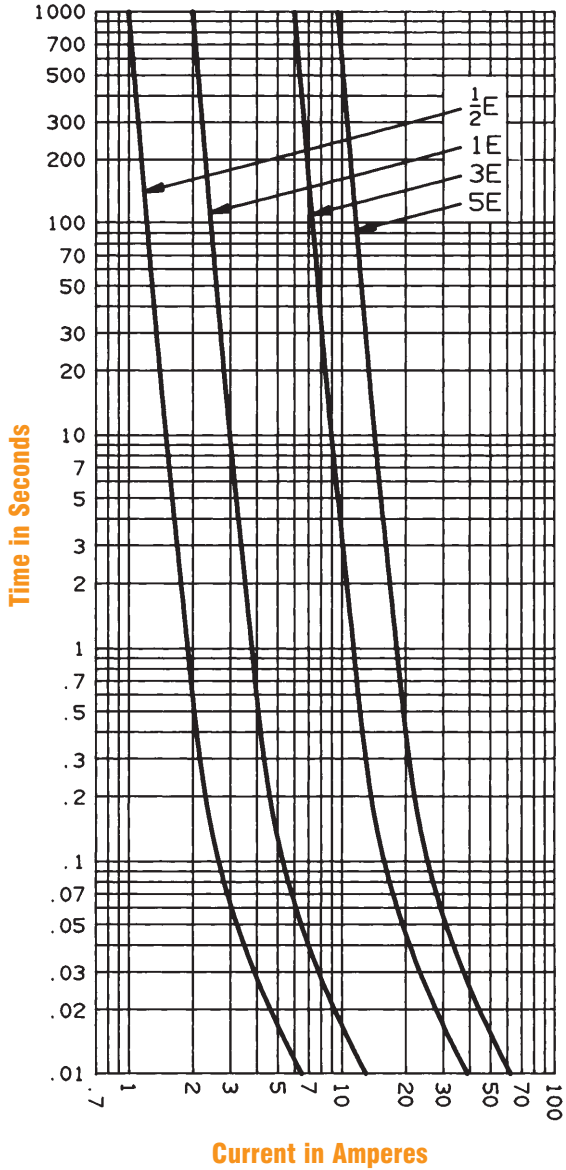

A720T1E-1 and A720T2E-1

Melting Time – Current Data - PT Fuses - 7200V

